



# 10W Output Switching Power Supply

# PM-10 series



### ■ Features :

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Ultra-miniature size, light weight
- Cooling by free air convection
- Isolation class II
- Medical safety approved (2 x MOPP between primary to secondary)(Note.6)
- No load power consumption<0.5W
- 100% full load burn-in test
- Fixed switching frequency at 67KHz
- High reliability
- 3 years warranty




### SPECIFICATION

| MODEL                  | PM-10-3.3  | PM-10-5   | PM-10-12     | PM-10-15     | PM-10-24       |              |
|------------------------|--|---|--------------|--------------|----------------|--------------|
| OUTPUT                 | DC VOLTAGE   | 3.3V  | 5V           | 12V          | 15V            | 24V          |
|                        | RATED CURRENT  | 2.5A  | 2A           | 0.85A        | 0.67A          | 0.42A        |
|                        | CURRENT RANGE  | 0 ~ 2.5A  | 0 ~ 2A       | 0 ~ 0.85A    | 0 ~ 0.67A      | 0 ~ 0.42A    |
|                        | RATED POWER  | 8.25W   | 10W          | 10.2W        | 10.05W         | 10.08W       |
|                        | RIPPLE & NOISE (max.) Note.2   | 150mVp-p  | 150mVp-p     | 150mVp-p     | 150mVp-p       | 240mVp-p     |
|                        | VOLTAGE TOLERANCE Note.3   | ±3.0%   | ±2.0%        | ±2.0%        | ±2.0%          | ±2.0%        |
|                        | LINE REGULATION  | ±1.0%   | ±1.0%        | ±0.5%        | ±0.5%          | ±0.5%        |
|                        | LOAD REGULATION  | ±1.0%   | ±1.0%        | ±1.0%        | ±1.0%          | ±0.5%        |
|                        | SETUP, RISE TIME   | 1800ms, 20ms/230VAC      1800ms, 20ms/115VAC at full load   |              |              |                |              |
| HOLD UP TIME (Typ.)    | 100ms/230VAC      24ms/115VAC at full load   |   |              |              |                |              |
| INPUT                  | VOLTAGE RANGE  | 85 ~ 264VAC      120 ~ 370VDC   |              |              |                |              |
|                        | FREQUENCY RANGE  | 47 ~ 440Hz  |              |              |                |              |
|                        | EFFICIENCY (Typ.)  | 66%   | 74%          | 78%          | 79%            | 79%          |
|                        | AC CURRENT (Typ.)  | 0.25A/115VAC      0.15A/230VAC  |              |              |                |              |
|                        | INRUSH CURRENT (Typ.)  | COLD START 25A/115VAC      45A/230VAC   |              |              |                |              |
| LEAKAGE CURRENT Note.5 | Touch current < 80µA/264VAC  |   |              |              |                |              |
| PROTECTION             | OVERLOAD   | Above 105% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed |              |              |                |              |
|                        | OVER VOLTAGE   | 3.8 ~ 4.95V   | 5.75 ~ 6.75V | 13.8 ~ 16.2V | 17.25 ~ 20.25V | 27.6 ~ 32.4V |
| ENVIRONMENT            | WORKING TEMP.  | -20 ~ +70°C (Refer to "Derating Curve")   |              |              |                |              |
|                        | WORKING HUMIDITY   | 20 ~ 90% RH non-condensing  |              |              |                |              |
|                        | STORAGE TEMP., HUMIDITY  | -40 ~ +85°C, 10 ~ 95% RH  |              |              |                |              |
|                        | TEMP. COEFFICIENT  | ±0.03%/°C (0 ~ 50°C)  |              |              |                |              |
|                        | VIBRATION  | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes   |              |              |                |              |
| SAFETY & EMC (Note 4)  | SAFETY STANDARDS   | ANSI/AAMI ES60601-1, TUV EN60601-1, IEC60601-1 approved   |              |              |                |              |
|                        | WITHSTAND VOLTAGE  | I/P-O/P:4KVAC   |              |              |                |              |
|                        | ISOLATION RESISTANCE   | I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH  |              |              |                |              |
|                        | EMC EMISSION   | Compliance to EN55011(CISPR11),EN55022 (CISPR22) Class B, EN61000-3-2,-3  |              |              |                |              |
| OTHERS                 | EMC IMMUNITY   | Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN60601-1-2, EN61204-3, medical level, criteria A                      |              |              |                |              |
|                        | MTBF   | 723.2Khrs min.      MIL-HDBK-217F (25°C)  |              |              |                |              |
|                        | DIMENSION  | 70*50*22.7mm (L*W*H)  |              |              |                |              |
|                        | PACKING  | 0.105Kg; 120pcs/13.6Kg/0.97CUFT   |              |              |                |              |
| NOTE                   | <ol style="list-style-type: none"> <li>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>3. Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.</li> <li>5. Touch current was measured from primary input to DC output.</li> <li>6. Suitable for BF application with appropriate system consideration.</li> </ol> |   |              |              |                |              |


■ Mechanical Specification

Case No. 949A Unit:inch(mm)

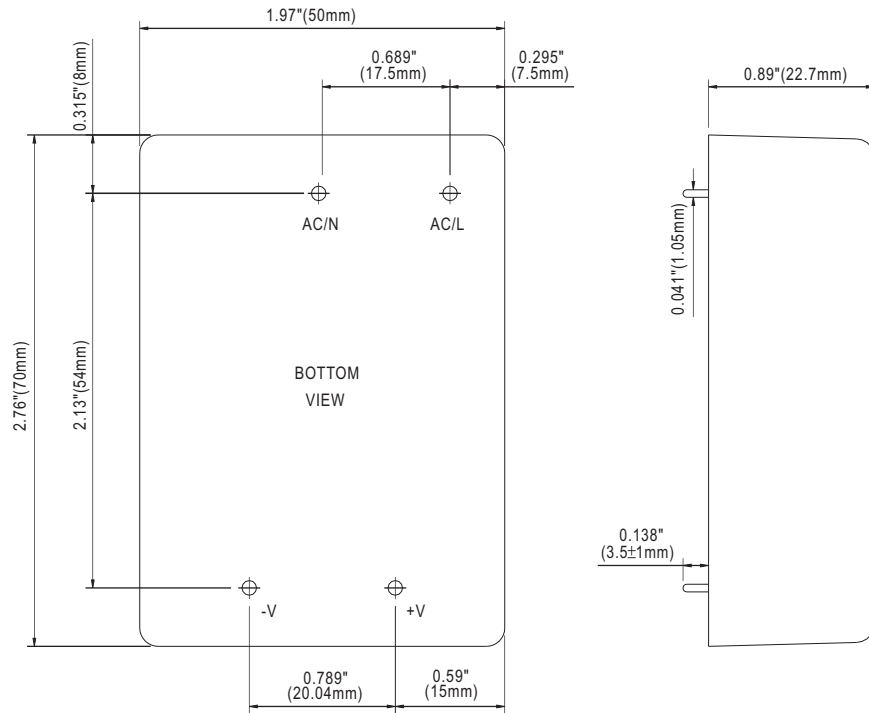


■ Block Diagram

fosc : 67KHz

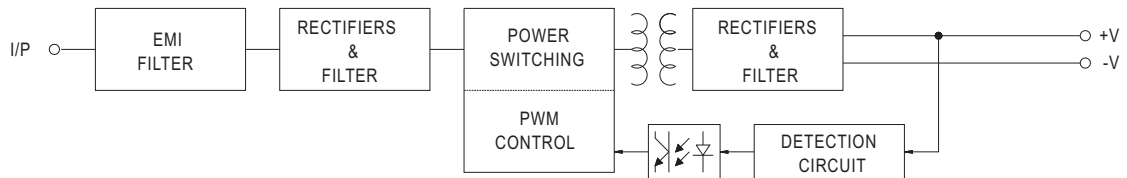

■ Derating Curve

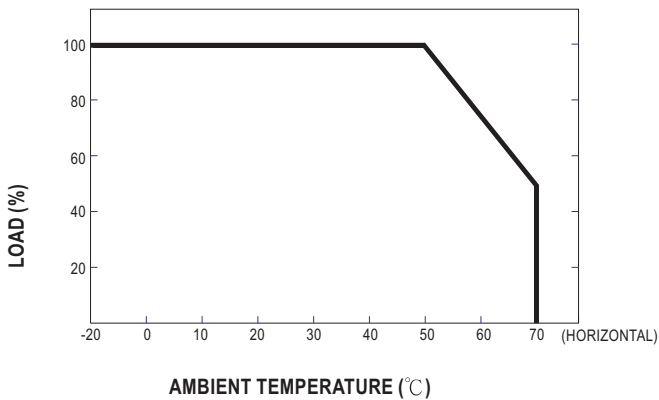

■ Output Derating VS Input Voltage

